

Key Features

- Support GPS/GLONASS L1 frequencies.
- Sub-centimeter phase center repeatability.
- LNA has high gain to ensure operation with long cable.
- Mini size and lightweight
- Small rugged package ideal for aviation and vehicle applications
- Radome uses heat resistant material and protects internal components by heat insulation design.
- Unique waterproof design ensures the absolutely seal of kernel part and operation outdoors.

Aviation Antenna HX-GA284A


HX-GA284A antenna has been designed to support high accuracy aerial, land and marine applications in one compact design with high-performance and light weight.

This antenna is an aviation type of design, which has 4 holes bulkhead mounting allows the antenna to be used in the most rugged of environments. This is an ideal design for customers building machine control systems. The antenna can be mounted flush with the vehicle surface or on the top of a pole mount. The TNC connector is located on the underside of the unit ensuring the attached cable is also protected from the environment.


Technical Specifications

Antenna Specification	
Frequency Range	GPS L1 GLONASS I1
Impedance	50ohm
Polarization	RHCP
Axial Ratio	≤3dB
Azimuth Coverage	360°
Output VSWR	≤2.0
Peak Gain	≥3dBi
LNA Specification	
LNA Gain	36±2dB
Noise Figure	≤2.0dB

Output VSWR	≤2.0
Operation Voltage	3~18VDC
Operation Current	≤45mA
Mechanical Specification	
Dimension	φ88.9×35mm
Connector	TNC Female
Weight	215g
Environment Specification	
Storage Temp	-55℃~+85℃
Operating Temp	-40℃~+80℃
Humidity	95% No-condensing

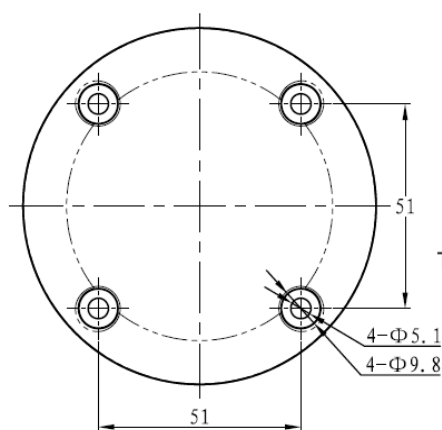

Top view

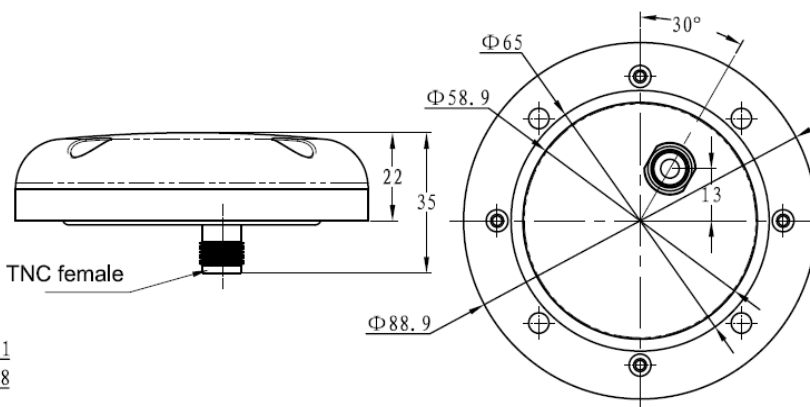

Side view

Bottom view

Dimension (mm)

Harxon Corporation

 www.harxon.com
 sales@harxon.com
 Tel: +86 0755-26989948 Fax: +86 0755-26989994



www.orbitica.com 
contact@orbitica.com 
 +33 (0)5 62 24 31 76 

HARXON AUTHORIZED DISTRIBUTION PARTNER